UNIT SQUARE FOOTAGE NOTES "UNIT B1 - ELEVATION "B"	
UNIT AREAS	SQ. FT.
FIRST FLOOR A/C	916 SF
SECOND FLOOR A/C	0 SF
GARAGE	237 SF
COV. PATIO	77 SF
ELEV A PORCH	65 SF
TOTAL A/C	916 SF

#DOOR SCHEDULE

NO.	SIZE	TYPE	DESCRIPTION	COUNT
1	3'-0"x8'-0"	H	SOLID CORE WOOD	1
2	3'-0"x8'-0"	H	SOLID CORE WOOD (FRENCH DOOR)	1
3	2'-8"x6'-8"	B	SOLID CORE WOOD (20 MIN. RATED)	1
4	8'-0"x7'-0"	Y	ALUMINUM SECTIONAL (GARAGE DOOR)	1
5	2'-8"x8'-0"	F	HOLLOW CORE WOOD	1
6	3'-0"x6'-8"	C	HOLLOW CORE WOOD	1
10	2'-8"x6'-8"	A	HOLLOW CORE WOOD	2
11	2'-0"x6'-8"	A	HOLLOW CORE WOOD	2
14	2'-4"x6'-8"	A	HOLLOW CORE WOOD	3
15	(2) 2'-0"x6'-8"	D	HOLLOW CORE WOOD	1

A WINDOW SCHEDULE

MARK	SIZE: WIDTH x HEIGHT	TYPE	DESCRIPTION	COUNT
K	3'-0"x5'-0"	1	VINYL, INSULATED SINGLE HUNG	7
* CHECK UNIT PLAN FOR LOCATION OF TEMP WINDOWS				

LEGEND

1. INDICATES DOOR TYPE
2. INDICATES WINDOW TYPE
3. INDICATES WALL TYPE
4. INDICATES INTERIOR ELEVATIONS
5. INDICATES 1 HR. WALL (U.L. V340 ASSEMBLY) LOCATED AT ZERO LOT LINE ONLY. REFER TO SITE PLAN FOR LOCATIONS.

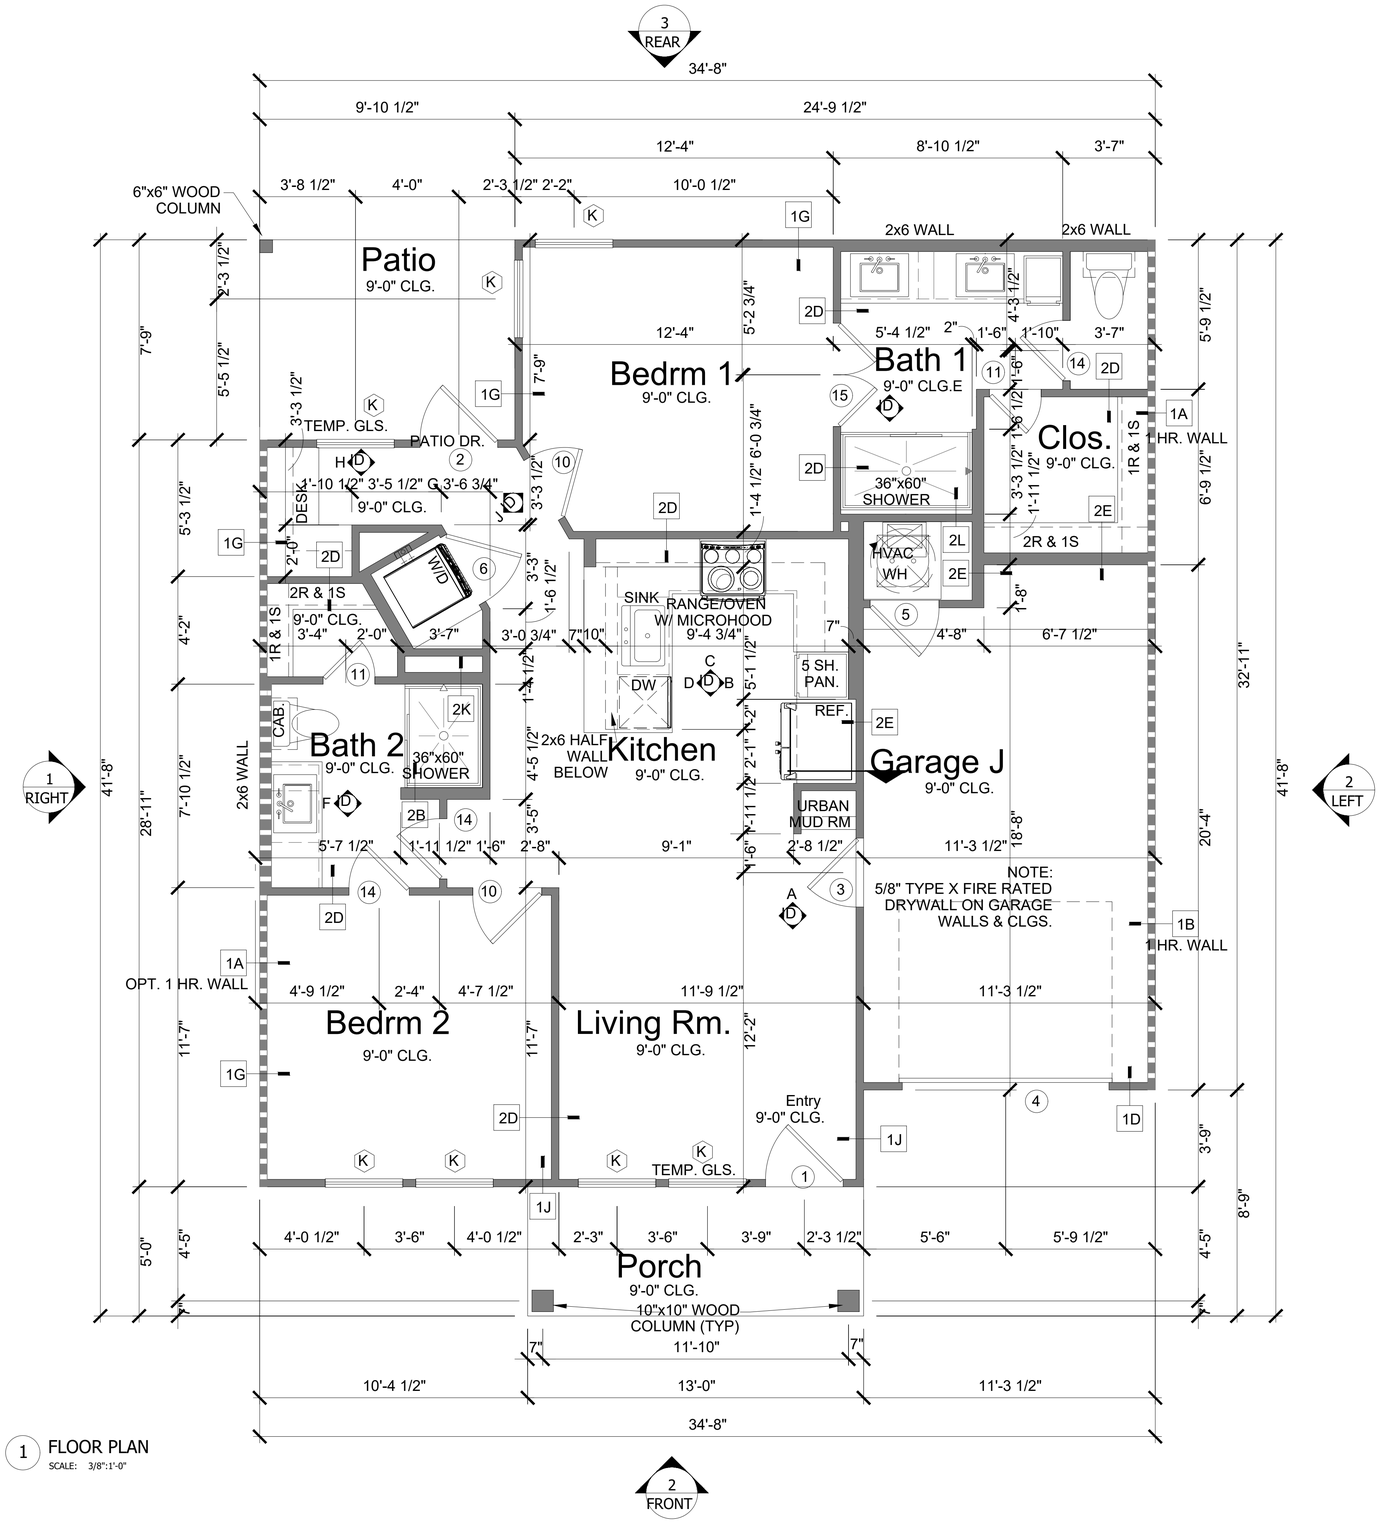

1 FLOOR PLAN
SCALE: 3/8":1'-0"

DAYTONA B1 942 Fr SF 1ST 2BD 2BA 1G

A1.1 - Floor Plan

SOUTHERN IMPRESSION HOMESS
5711 Richard Street
Jacksonville, FL 32216
(904) 814-7428

No.	Revisions	Date	By
1			
2			
3			
4			
5			
6			

Date 10/18/24
Scale AS SHOWN
Job SF - DAY
Sheet A1.1 - Floor Plan